

X2 Frequency Multiplier

KSX2-14+

50Ω Output 5000 to 10000 MHz



Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input, 25°C	100 mW

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

INPUT	4
OUTPUT	8
50Ω TERMINATE EXT.	2
GROUND	1,3,5,6,7

Outline Drawing

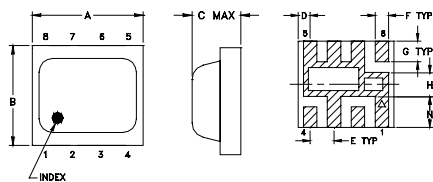

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch)

A	B	C	D	E	F	G
.200	.180	.087	.025	.050	.028	.043
5.08	4.57	2.21	0.64	1.27	0.71	1.09
H	J	K	L	M	N	wt
.050	.030	.060	0.238	0.144	0.065	grams
1.27	0.76	1.52	6.05	3.66	1.65	0.08

Demo Board MCL P/N: TB-473+ Suggested PCB Layout (PL-287)

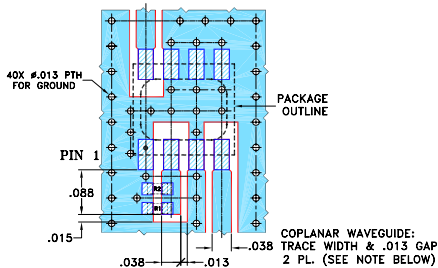

Features

- low conversion loss, 12 dB typ.
- high fundamental & harmonic suppression, F1, 22 dBc typ.; F3, 30 dBc typ.; F4, 15 dBc typ.
- LTCC design
- low profile, 0.085"
- aqueous washable

Applications

- synthesizers
- local oscillators

Electrical Specifications

MULTIPLICATION FACTOR	FREQUENCY (MHz)		INPUT POWER (dBm)		CONVERSION LOSS (dB)		*HARMONIC OUTPUT (dBC)					
	F1	F2	Min. Max.		Typ. Max.		F1		F3		F4	
	Input	Output					Typ.	Min.	Typ.	Min.	Typ.	Min.
2	2500-3600	5000-7200	13	17	12	15	22	15	33	22	12	7
	3600-5000	7200-10000	13	17	12	15	22	15	29	20	19	12

* Harmonics of input frequency below the power level of F2

CASE STYLE: HV1195
PRICE: \$7.45 ea. QTY (10-49)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Typical Performance Data

Input Frequency (MHz)	INPUT RF= 13 dBm				INPUT RF= 17 dBm					
	Conversion Loss (dB)	Harmonic Output Below F2 (-dBc)				Conversion Loss (dB)	Harmonic Output Below F2 (-dBc)			
		F2	F1	F3	F4		F2	F1	F3	F4
2500.00	12.37	25.84	36.55	15.32	12.41	22.40	42.01	13.59		
2650.00	13.11	23.43	33.03	10.38	12.84	20.79	35.80	11.88		
2950.00	12.65	20.52	35.09	14.71	12.10	22.60	40.40	16.25		
3250.00	11.17	20.69	39.66	19.86	11.13	22.72	35.01	22.27		
3400.00	11.02	21.65	38.24	20.97	10.97	23.66	34.49	29.39		
3600.00	11.84	21.22	31.35	19.22	11.46	24.06	30.95	18.17		
3700.00	12.04	20.92	29.07	18.76	11.46	24.38	30.44	18.57		
3850.00	12.87	19.94	26.95	18.55	12.21	23.02	27.31	16.18		
4000.00	12.00	21.20	29.60	19.09	12.05	21.96	29.80	16.13		
4100.00	12.14	19.80	30.30	22.19	11.63	20.70	38.78	18.02		
4300.00	11.60	27.55	33.42	25.38	10.76	24.67	34.27	21.10		
4500.00	12.08	27.72	44.95	26.65	11.58	34.31	36.29	22.37		
4600.00	11.56	29.19	44.66	30.33	11.38	33.92	38.18	27.85		
4900.00	12.00	35.63	27.43	39.29	11.71	30.26	26.93	34.31		
5000.00	11.98	29.52	25.76	45.31	11.81	29.92	24.65	41.43		


KSX2-14+
CONVERSION LOSS

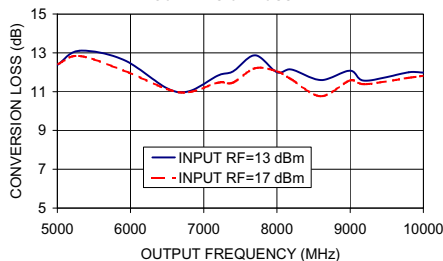


KSX2-14+
HARMONIC OUTPUT F1

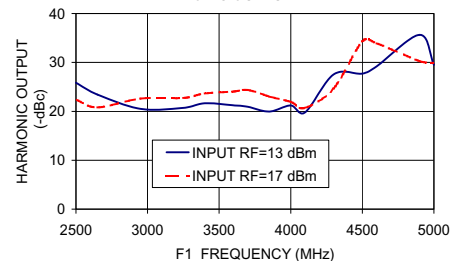

KSX2-14+
HARMONIC OUTPUT F3

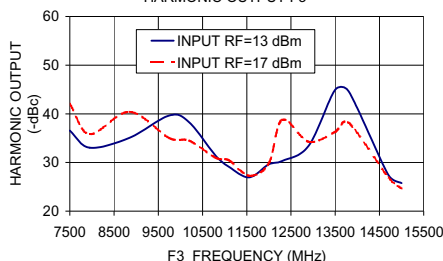

KSX2-14+
HARMONIC OUTPUT F4

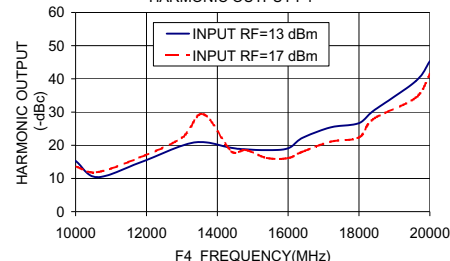

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED
The Design Engineers Search Engine
IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M118081
KSX2-14+
ED-13386/5
DJ/CP
081230