

ULTRA·REL[®] Ceramic Hermetic Frequency Mixers

MAC Series

300 MHz to 12 GHz LO Levels 4 to 17 dBm

The Big Deal

- 3-Year Guarantee
- Hermetically sealed LTCC construction
- Low-profile case, 0.06" high
- Priced for outstanding VALUE



CASE STYLE: DZ1650

Product Overview

Mini-Circuits MAC mixers employ a unique new design and a highly repeatable, tightly controlled, automated process that delivers industry-leading reliability at a remarkably affordable price. Schottky diode quads meeting our strict specifications are bonded to a multilayer integrated LTCC substrate, and then hermetically sealed under a controlled atmosphere with gold-plated covers and eutectic AuSn solder. These passive, double-balanced mixers have been tested to MIL requirements for gross leak, fine leak, thermal shock, vibration, acceleration, mechanical shock, and HTOL, and every MAC mixer is backed with our 3-year guarantee.

[Click here for more about the MAC mixer](#)

Key Features

| Feature | Advantages |
|-----------------------------------|--|
| Low, Flat Conversion Loss | No need to compensate for variations over frequency. |
| Hermetically Sealed | Ideal for use anywhere long-term reliability adds bottom-line value: high moisture areas, busy production lines, high-speed distribution centers, heavy industry, outdoor settings, and unmanned facilities, as well as military applications. |
| Rugged LTCC/Hermetic Construction | Demonstrated reliability in harsh, physically abusive environments with high vibration, acceleration, and/or mechanical shock. |
| Wide Operating Temperature Range | Guaranteed performance from -55 to +125°C. MAC mixers have also passed thermal shock testing from -55 to +150°C, through 1000 cycles, 15 minutes per cycle. |
| Exposed Termination Ends | Our unique case design allows for easy visual inspection of side solder fillets per IPC-A-610 section 8.3.4.6, and features gold-plated terminations for excellent solderability. |
| Incredible Performance/Price | Game-changing affordability brings Hi-Rel hermetic mixers within the reach of commercial budgets. |



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 *The Design Engineers Search Engine*  Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Ceramic, Hermetically Sealed Frequency Mixer WIDE BAND

MAC-60MH+

Level 13 (LO Power+13 dBm) 1600 to 6000 MHz

Maximum Ratings

| | |
|---|----------------|
| Operating Temperature | -55°C to 125°C |
| Storage Temperature | -65°C to 150°C |
| RF Power | 50 mW |
| IF Current | 40 mA |
| Permanent damage may occur if any of these limits are exceeded. | |

Pin Connections

| | |
|--------|---------------|
| LO | 10 |
| RF | 5 |
| IF | 3 |
| GROUND | 1,2,4,6,7,8,9 |

Features

- wide bandwidth, 1600 to 6000 MHz
- low conversion loss, 6.5 dB typ.
- excellent L-R isolation, 35 dB typ.
- LTCC double balanced mixer
- aqueous washable
- low cost
- low profile, 0.060"
- protected by US Patent 7,027,795
- **3-YEAR GUARANTEE - The Most Reliable Mixers**

Applications


- PCN
- defense and weather radar
- WCDMA
- defense communications

Electrical Specifications at 25°C

| Parameter | Condition (MHz) | Min. | Typ. | Max. | Units |
|------------------------------------|-----------------|------|--------------------|------|-------|
| Frequency Range, LO/RF | | | 1600 - 6000 | | MHz |
| Frequency Range, IF | | | DC - 2000 | | MHz |
| Conversion Loss* | 1600 - 4400 | — | 6.5 | 7.2 | dB |
| | 4400 - 6000 | — | 6.1 | 7.4 | dB |
| LO to RF Isolation | 1600 - 4400 | 30 | 35 | — | dB |
| | 4400 - 6000 | 20 | 24 | — | dB |
| LO to IF Isolation | 1600 - 4400 | 14 | 18 | — | dB |
| | 4400 - 6000 | 10 | 21 | — | dB |
| IP3 | 1600 - 4400 | — | 17 | — | dBm |
| | 4400 - 6000 | — | 16 | — | dBm |
| RF Input Power at 1 dB Compression | 1600 - 6000 | | +9 | | dBm |

*Conversion Loss measured at 30 MHz IF.


Outline Drawing

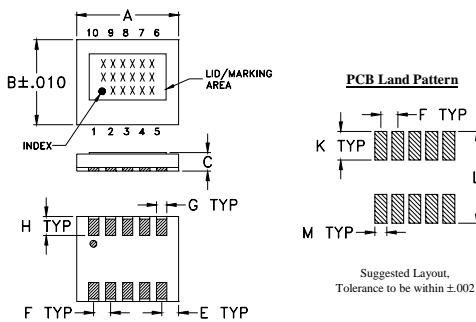


Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G | |
|------|------|------|------|------|------|-------|--|
| .30 | .250 | .060 | -- | .050 | .050 | .030 | |
| 7.62 | 6.35 | 1.52 | -- | 1.27 | 1.27 | 0.76 | |
| H | J | K | L | M | | wt | |
| .056 | -- | .085 | .270 | .035 | | grams | |
| 1.42 | -- | 2.16 | 6.86 | 0.89 | | 0.29 | |

Demo Board MCL P/N: TB-144 Suggested PCB Layout (PL-045)

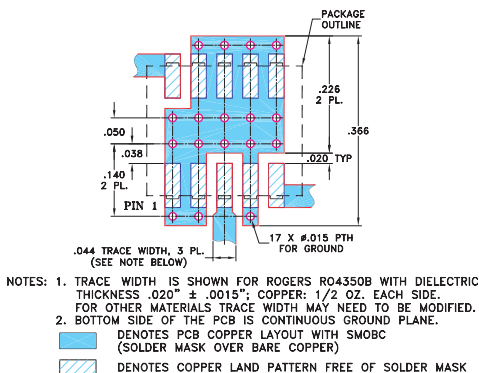

Electrical Schematic

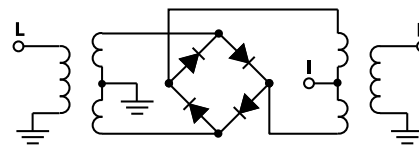

CASE STYLE: DZ1650
PRICE: \$7.45 ea. QTY (10)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel at no extra cost

| Reel Size | Devices/Reel |
|-----------|---------------------------|
| 7" | 10, 20, 50, 100, 200, 500 |
| 13" | 1000 |

Typical Performance Data at 25°C and LO=+13 dBm

| Frequency (MHz) | Conversion Loss (dB) | | Isolation L-R (dB) | | Isolation L-I (dB) | | VSWR RF Port (:1) | | VSWR LO Port (:1) | |
|-----------------|----------------------|------|--------------------|-----------|--------------------|-----------|-------------------|-----------|-------------------|--|
| | RF | LO | LO +13dBm | LO +13dBm | LO +13dBm | LO +13dBm | LO +13dBm | LO +13dBm | LO +13dBm | |
| 1600.1 | 1630.1 | 6.76 | 32.32 | 17.62 | 2.54 | 3.70 | | | | |
| 1800.1 | 1830.1 | 6.15 | 39.96 | 19.62 | 2.94 | 2.28 | | | | |
| 2000.1 | 2030.1 | 6.06 | 38.16 | 19.96 | 3.11 | 1.79 | | | | |
| 2200.1 | 2230.1 | 5.64 | 33.71 | 19.77 | 2.70 | 1.74 | | | | |
| 2400.1 | 2430.1 | 5.60 | 34.29 | 18.70 | 2.39 | 1.79 | | | | |
| 2600.1 | 2630.1 | 5.55 | 32.95 | 18.55 | 1.82 | 1.80 | | | | |
| 2800.1 | 2830.1 | 6.04 | 39.53 | 18.57 | 2.68 | 1.98 | | | | |
| 3000.1 | 3030.1 | 6.64 | 33.87 | 18.03 | 3.28 | 2.24 | | | | |
| 3200.1 | 3230.1 | 6.47 | 34.63 | 17.30 | 2.90 | 2.56 | | | | |
| 3400.1 | 3430.1 | 6.74 | 34.00 | 16.41 | 2.94 | 2.85 | | | | |
| 3600.1 | 3630.1 | 6.62 | 35.65 | 15.72 | 2.96 | 3.18 | | | | |
| 3800.1 | 3830.1 | 6.60 | 37.59 | 16.55 | 2.82 | 3.43 | | | | |
| 4000.1 | 4030.1 | 6.99 | 39.07 | 16.83 | 2.70 | 3.52 | | | | |
| 4600.1 | 4630.1 | 5.76 | 30.62 | 20.19 | 1.83 | 3.06 | | | | |
| 5000.1 | 5030.1 | 6.34 | 25.52 | 21.92 | 2.14 | 1.56 | | | | |
| 5200.1 | 5230.1 | 6.15 | 23.59 | 21.32 | 1.87 | 1.17 | | | | |
| 5400.1 | 5430.1 | 5.85 | 21.51 | 18.70 | 1.74 | 1.66 | | | | |
| 5600.1 | 5630.1 | 5.99 | 21.72 | 13.71 | 1.65 | 2.59 | | | | |
| 5800.1 | 5830.1 | 6.09 | 22.94 | 12.15 | 1.89 | 4.29 | | | | |
| 6000.1 | 6030.1 | 7.01 | 24.00 | 11.83 | 2.82 | 7.29 | | | | |

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED









For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com


IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. B
M136739
ED-14156/10
MAC-60MH+
DJ/CP/AM
121204
Page 2 of 4

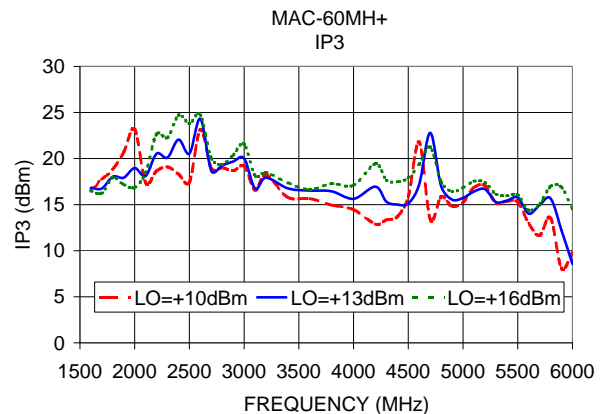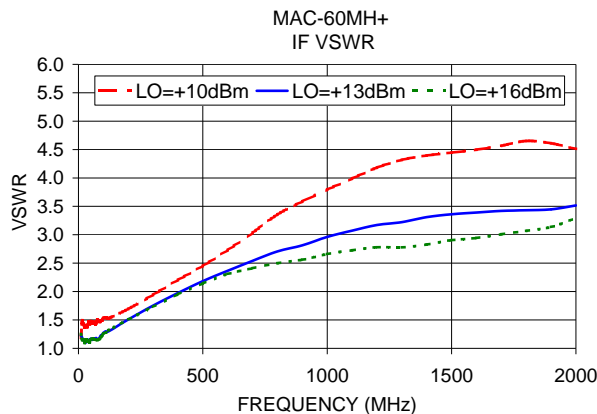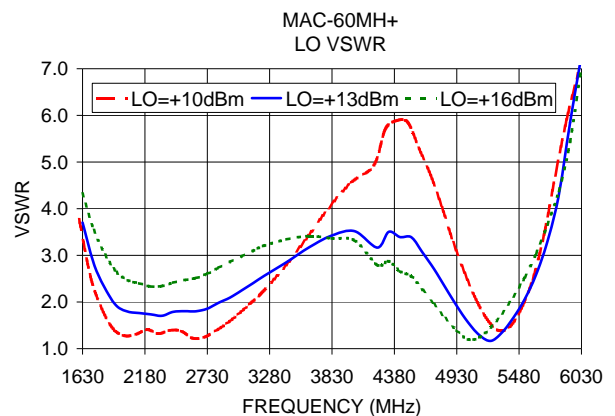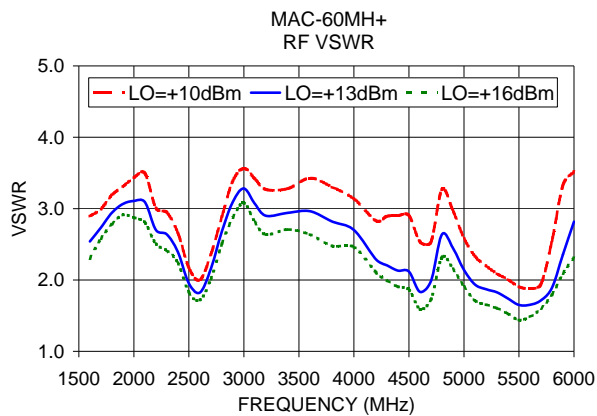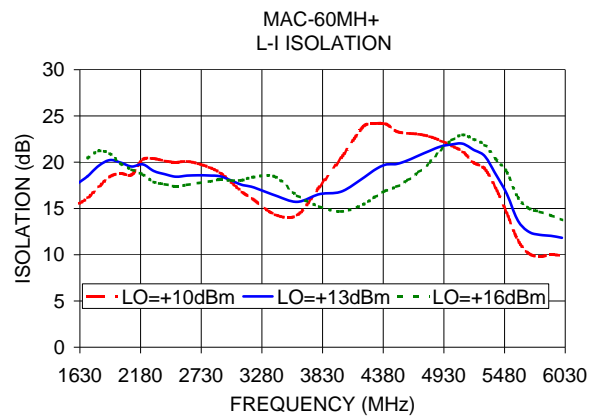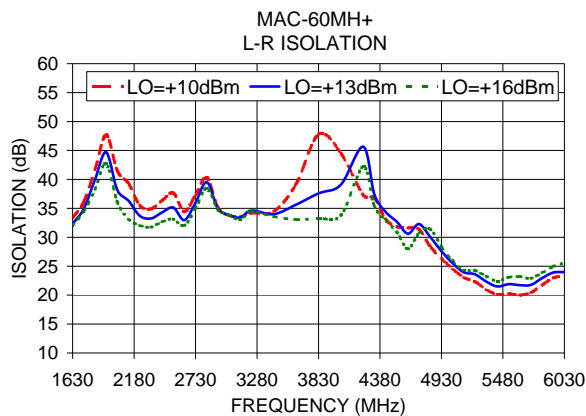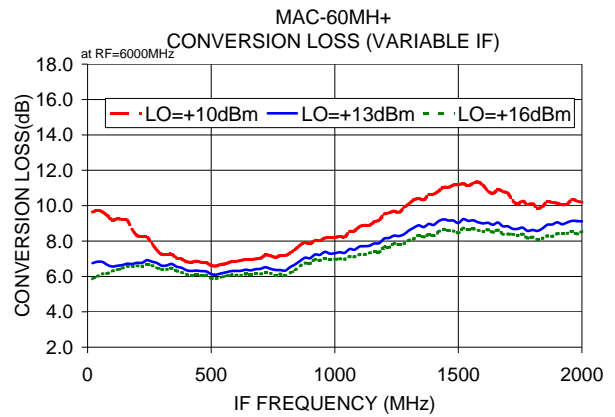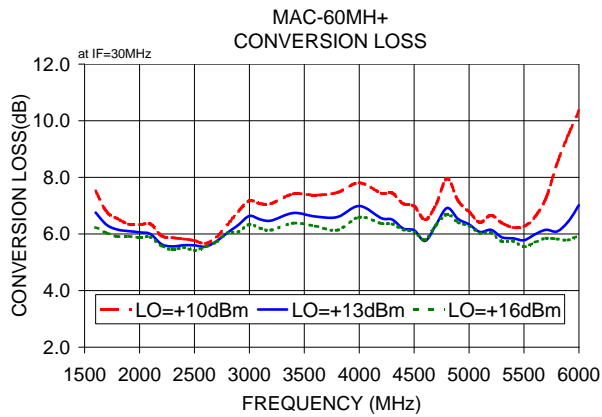

Designed and Built for Long-Term Reliability in **HOSTILE ENVIRONMENTS**

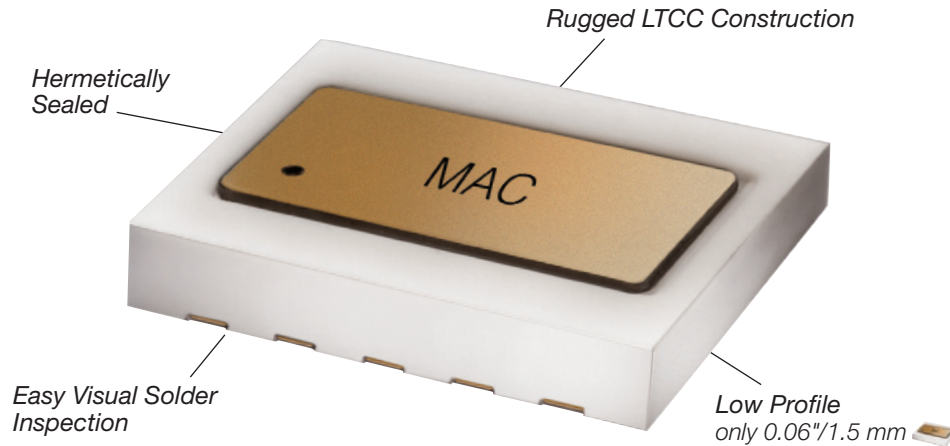

Mini-Circuits MAC mixers meet or exceed the following qualifications:

| | |
|--------------------------|--|
| Gross Leak | MIL-STD-202 Method 112, Condition D (100% of all MAC Mixers we ship) |
| Fine Leak | MIL-STD-202 Method 112, Condition C, Procedure IIIa |
| Thermal Shock | MIL-STD-202 Method 107 (-55/+100°C, 1000 cycles, 15 minutes) (-55/+150°C, 1000 cycles, 15 minutes) |
| Vibration | MIL-STD-202 Method 204, Condition D (10-2000Hz sine, 20g, 3 axis, 12 c.y.ea.) |
| Acceleration | MIL- STD-883 Method 2001, Condition E |
| Mechanical Shock | MIL-STD-202 Method 213, Condition A |
| HTOL | MIL-STD-202 Method 108, Condition D (1000 hours, 125°C, at rated LO level) |
| Multiple Reflow | JESD22-B102 |
| Bend Test | JESD22-B113 |
| Adhesion Strength | Push test >10lb |



All Photos courtesy of U.S. Military and NASA

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.